

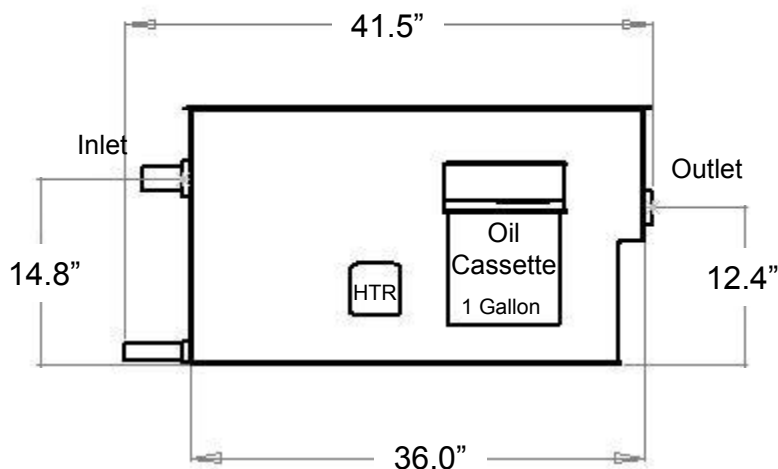


# goslyn™ MODEL GOS80 25 GPM (US) Grease Recovery Device

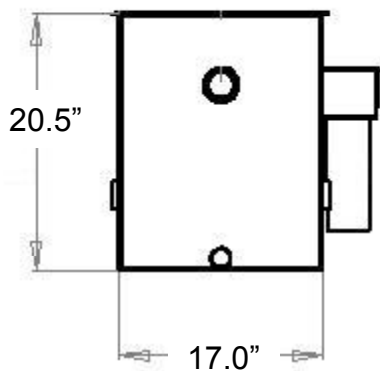

The innovative (patented) goslyn™ is an immiscible liquid separator which operates under hydro-static pressure. The goslyn™ does not require any moving parts. It continuously and permanently removes Fat, Oil & Grease (FOG) from waste water - keeping your drains free and clear while eliminating the need for costly dousing systems and/or grease trap pumping. Recovered oil is recycled with your used fryer oil.

No Chemicals. No Consumables.

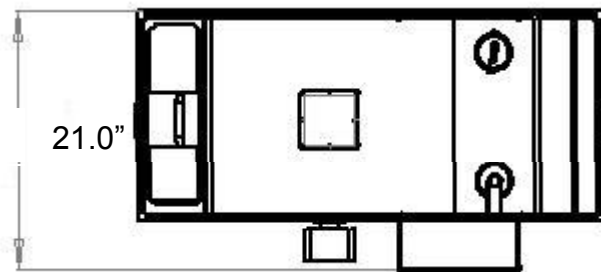

### GOS80 Features:

- HEAVY DUTY 2.5 MM 304 Stainless Steel EXTERIOR CONSTRUCTION
- NEOPRENE SEALS FOR BASE
- FIXED RATE FLOW RESTRICTOR INCLUDED (25US GPM - 94.64 Liters)
- IMMERSION HEATER (UL LISTED) TO KEEP EFFLUENT WARM DURING IDLE PERIODS
- SELF-CLOSING DRAIN VALVE INCLUDED
- STRAINER BASKET TO PREVENT SOLID DEBRIS FROM ENTERING DRAIN PIPES
- EASY ACCESS HINGED LID COMPARTMENTS
- TWO OIL COLLECTION CASSETTES INCLUDED (1 spare)
- NSF CERTIFIED TO ASME A112.14.3 and ASME A112.14.4


### Installation Requirements

#### Electrical:

110 Volt, 1000 watts, 9 Amps - within 5 feet of Goslyn.

#### Physical:

- Headroom needed above strainer basket: 12"
- 2" drain pipe to outlet
- Access to front Oil Cassette
- Access to hinged lid for Oil Valve

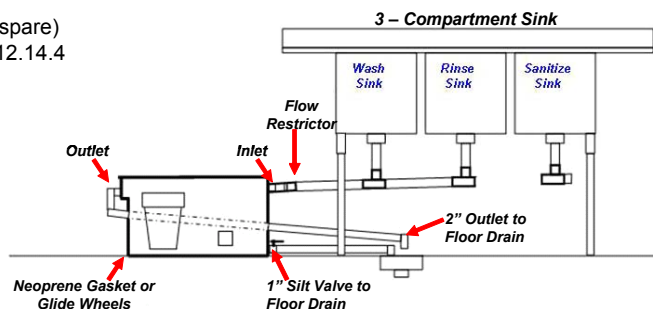

CSA B481.1 Certified

